

Pennsylvania Insert Corp
 Spring City PA 19475
 tel: 610-948-9688
 fax: 610-948-4975
 email: sales@pennsylvaniainsert.com
 web: www.pennsylvaniainsert.com


Approved/Notes

Customer _____
 Project _____
 Job# _____ Ship Date _____
 PA Insert Quote/Order# _____ Page _____ of _____

Fax to: _____
 Fax# _____
 From _____
 Date _____

"Just Set" ALUMINUM DOOR, STANDARD DUTY, SINGLE LEAF - TROUGH FRAME

- 1/4" Diamond Plate Lid Reinforced for 300 lb/ft² live load
- 6" Drain Trough Frame with Gasket
- Protective Barrier where Concrete meets Aluminum
- Continuous Anchor to Lock Frame into Concrete
- Stainless Steel Pneumatic Spring as required
- Stainless Steel Hinges
- Stainless Steel Hardware
- Type 316 Stainless Steel Snap Lock
- 1-1/2" (I.D.) Drain Coupling
- Automatic Hold Open Arm with Red Release Handle
- Flush Mounted Lift Handle

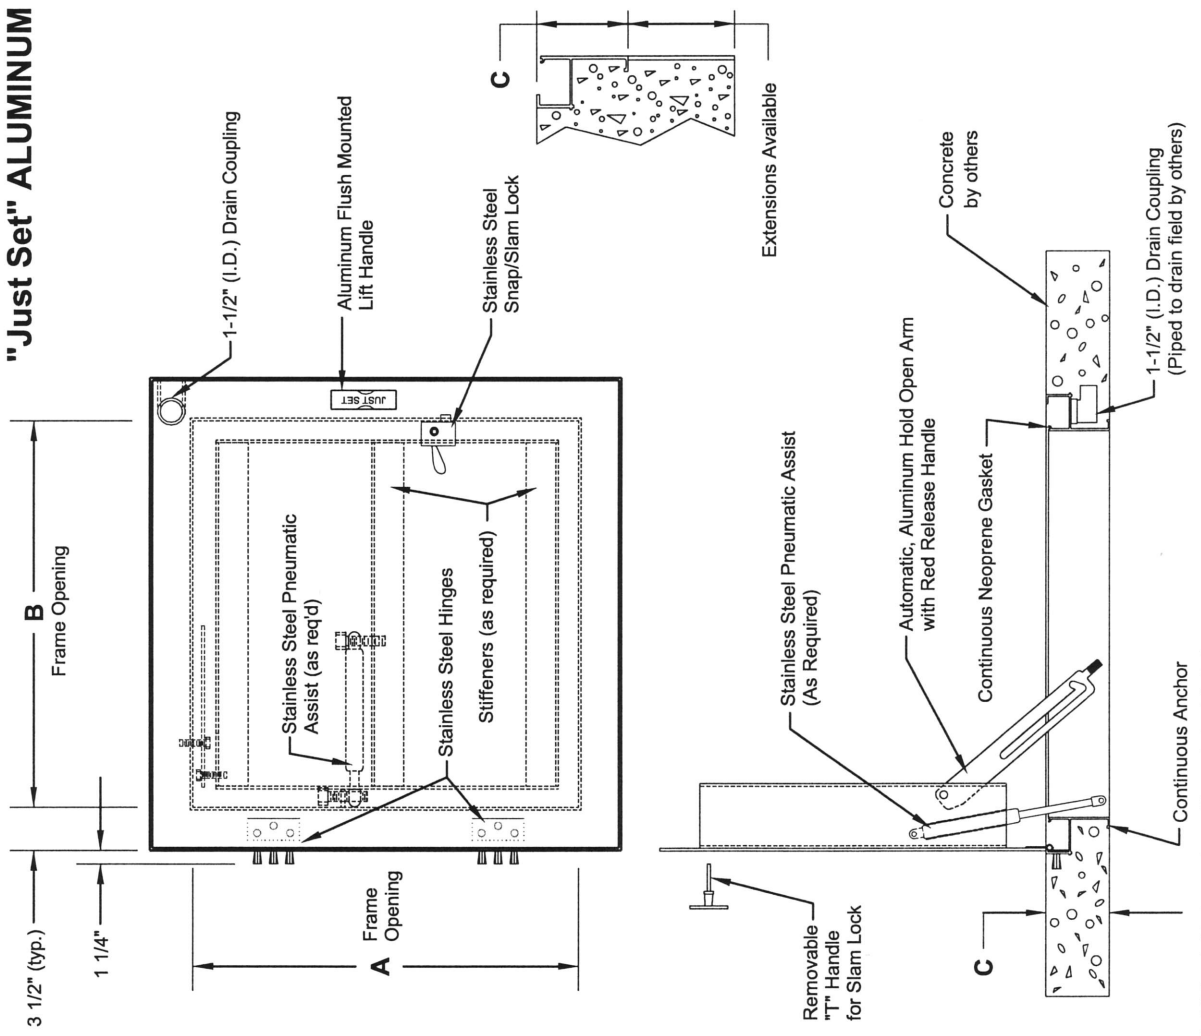

STANDARD DIMENSIONS				
QTY	A	B	C	STOCK#
	24"	24"	6.00"	ATS2424S
	30"	30"	6.00"	ATS3030S
	36"	24"	6.00"	ATS3624S
	36"	30"	6.00"	*ATS3630S
	36"	36"	6.00"	*ATS3636S
	42"	42"	6.00"	*ATS4242S
	48"	36"	6.00"	*ATS4836S
	48"	48"	6.00"	*ATS4848S

An asterisk (*) next to stock number = stainless steel pneumatic spring is standard.

**Installation shall be in accordance with manufacturer's instructions

NO SCALE