


Attention: _____
 From: _____
 Fax #: _____
 PA Insert Quote or Job Number: _____

Customer: _____
 Project: _____
 Job Number: _____
 Ship Date: ____ / ____ / ____

Date: ____ / ____ / ____
 Page ____ of ____

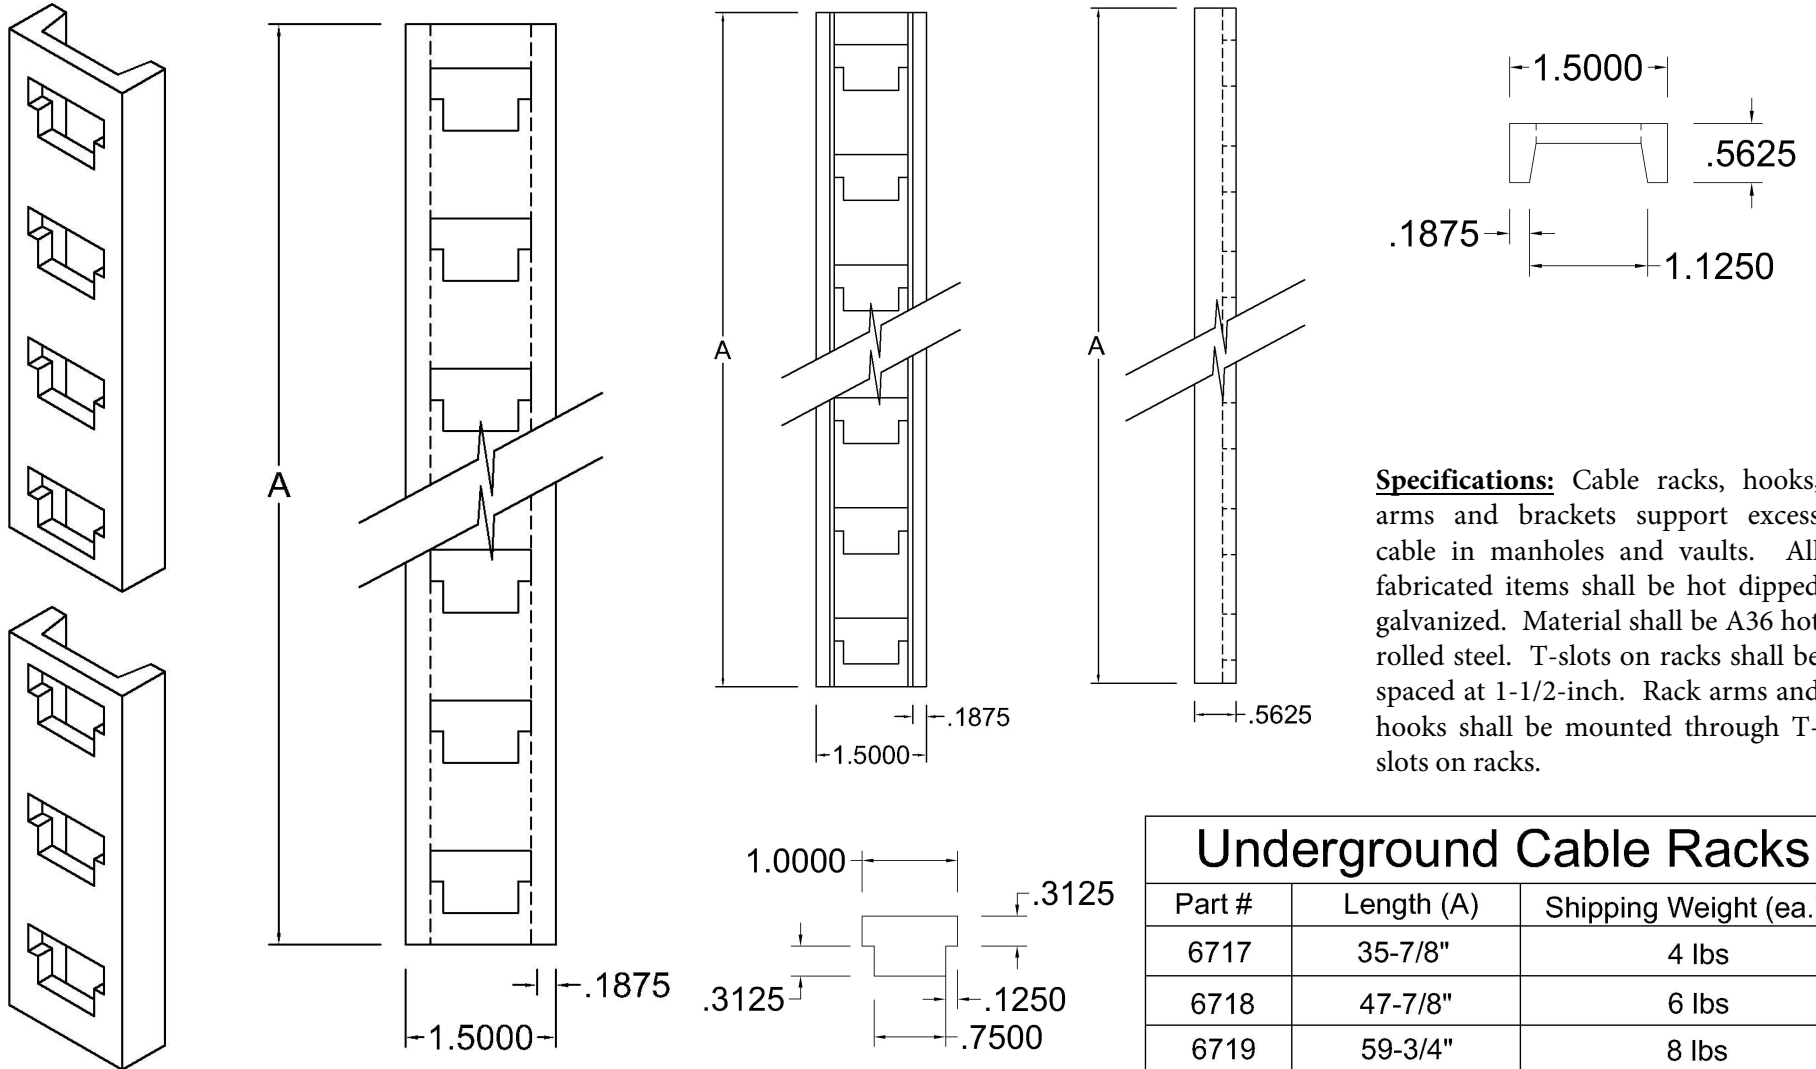

Specifications: Cable racks, hooks, arms and brackets support excess cable in manholes and vaults. All fabricated items shall be hot dipped galvanized. Material shall be A36 hot rolled steel. T-slots on racks shall be spaced at 1-1/2-inch. Rack arms and hooks shall be mounted through T-slots on racks.

Underground Cable Racks		
Part #	Length (A)	Shipping Weight (ea.)
6717	35-7/8"	4 lbs
6718	47-7/8"	6 lbs
6719	59-3/4"	8 lbs
6720	70-1/4"	10 lbs